



## ADVANCED DATA CAPTURE

# Linea<sup>®</sup> Pro Rugged<sup>™</sup>

For iPhone<sup>®</sup> 15 | 16 | 16e

The Linea Pro Rugged (LPR) 15, 16, and 16e are versatile, form-fitted barcode scanners, designed to transform an iPhone 15, 16, or 16e into an enterprise-grade device. Streamline operations by leveraging the programmable buttons and power of Apple Intelligence<sup>™</sup> to automate data entry with quick, reliable scans. Featuring a hot-swappable battery, the LPR improves efficiency and accuracy for high-volume scanning workflows with enough battery power to last multiple shifts. It's also built to withstand the toughest environments and operate in extreme temperatures, dust, water, and shock. Send and receive updates in real time, eliminate delays associated with traditional reporting methods, and stay connected with 24/7 uptime – even in the most remote locations.

IPCMobile offers a variety of LPR accessories (sold separately) for additional power, protection, and comfort. Reach out to your IPCMobile sales rep to see what's available and learn how you can customize our devices to match your company logo and brand.



Healthcare



Hospitality



Retail



Supply Chain



Travel



## PROGRAMMABLE BUTTONS

Optimize workflows with programmable buttons that can trigger specific data collection and ensure accurate data is automatically populated to whatever application is in the foreground.

## ADVANCED BARCODE SCANNING

Ensure accurate and reliable data capture with advanced barcode scanning technology and a multi-scan feature. The built-in 1D/2D barcode scanner can read all types of barcodes, including dirty, torn, low-contrast, or damaged labels and tags. An optional extended-range scan engine available for scans up to 30ft.

## CONTACTLESS RFID

Optional RFID card reader supports HF RFID. Compatible with Apple VAS and Google Smart Tap for a seamless contactless card reader experience.

## COMPACT DESIGN

The ultra-compact size allows employees to stay connected while on the move. The lightweight and slim design makes this device comfortable and easy to operate.

## AROUND-THE-CLOCK POWER

Equipped with a hot-swappable 2400 mAh smart battery to ensure uninterrupted operations throughout multiple shifts, allowing teams to minimize downtime and maximize productivity, even in the most remote locations.


## DURABLE PROTECTION

LPR is certified rugged and suitable for any industrial environment or harsh climates. It features an IP65 rating to protect against dust and moisture and a MIL-STD-810G drop rating.

## COMPREHENSIVE SOFTWARE

Compatible with a range of software and includes an SDK to integrate into existing platforms easily. Our suite of software tools helps you get the most out of your device, from data population to printing. Plus, a team of integration experts to help you every step of the way.

# IPCMobile | Linea Pro Rugged 15, 16, and 16e

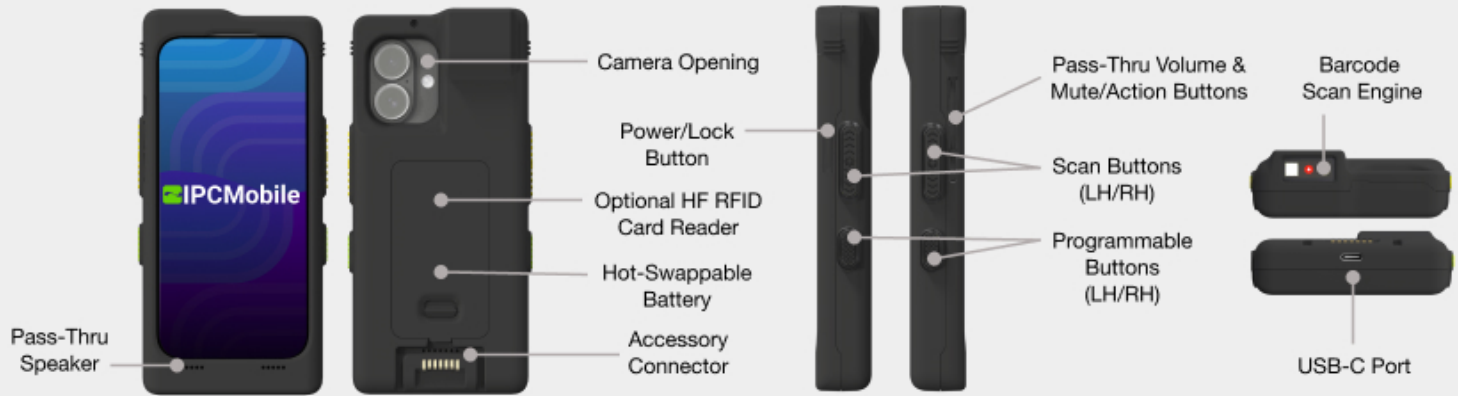

## SKU BY CONFIGURATION

LPR-ZS2D-PH5	Linea Pro Rugged for iPhone 15, Standard Range 2D
LPR-ZS2DHF-PH5	Linea Pro Rugged for iPhone 15, Standard Range 2D, HF RFID
LPR-ZS2D-PH6	Linea Pro Rugged for iPhone 16, Standard Range 2D
LPR-ZS2DHF-PH6	Linea Pro Rugged for iPhone 16, Standard Range 2D, HF RFID
LPR-ZA2DHF-PH6	Linea Pro Rugged for iPhone 16, Advanced Range 2D, HF RFID
LPR-ZS2D-PH6E	Linea Pro Rugged for iPhone 16e, Standard Range 2D
LPR-ZS2DHF-PH6E	Linea Pro Rugged for iPhone 16e, Standard Range 2D
LPR-ZA2DHF-PH6E	Linea Pro Rugged for iPhone 16e, Advanced Range 2D, HF RFID

## MECHANICAL

Dimensions	3.31in x 6.75in x 1.12in 84mm x 171.5mm x 28.4mm
Weight	181g / 6.38oz
Compatibility	iPhone 15, 16, or 16e (depending on SKU)
Port	USB Type-C, Accessory Connector
Buttons	2 Scan Buttons, 2 Programmable Buttons, access to iPhone Power/Lock, Volume, and Mute/Action Buttons

## ENVIRONMENTAL

Storage Temp.	-4°F to 158°F / -20°C to 50°C
Operating Temp.	14°F to 113°F / -10°C to 45°C
Humidity	5% to 90% RH (Non-Condensing)

## CERTIFICATIONS

Regulatory	CE, FCC, RoHS, Proposition 65, TSCA
Rating	1.2m Drop to Concrete per MIL-STD-810G IP65

## ELECTRICAL

1D/2D Scan Engine (Optional)	SE4750 Imager 1280 x 960 pixels SE4770 Imager 1280 x 800 pixels SE5500 Imager 2688 x 1520 pixels (scan engines are optional and not limited to models listed above)
Battery	Rechargeable Lithium-Ion Battery 3.6V / 2330mAh
Input Voltage	USB-PD (5V)
LED Indicators	Electromagnetic Buzzer
Port	USB Type-C
RFID Card Reader (Optional)	HF RFID 13.56 MHz, ISO/IEC 14443 Type A/B, MiFARE Mini, MiFARE Classic 1K/4K, MiFARE Ultralight/Ultralight-C, MiFARE Plus 2K/4K, MiFARE DESFire, ISO/IEC 15693, JIS X 6319-4 (compatible with FeliCA), ISO/IEC 18000-3 Mode 3 (NFC)

Specifications subject to change without notice. IPCMobile, Linea, and Linea Pro Rugged are trademarks of IPCMobile, Inc. All other trademarks are property of their respective owners.